



ReverseTap S-series

(COUNTER TOP)

User guide

BLU version (Back Light Unit)

RD S1
RD S2
RD S3
RD S4

SMART version (Smart Pad installed)

RD SL2

Thank you for your purchase of ReverseTap.

Please read this user manual carefully before using ReverseTap.

This user manual is for the actual users of ReverseTap, and includes functions and maintenance of each part of the machine.

(Please refer to S/W manual for controls and applications)

- Please be well-acquainted with the use of ReverseTap through this manual before using the product.
- Images in this manual can differ from the actual appearance of the product.
- Disassembling, repairing, or remodeling arbitrarily may cause malfunctioning of the product. Please contact the certified service center for repair.
- Changing the ReverseTap-provided software or using unofficial software may cause error or malfunctioning of the product.
- If you sense any burning smell or smoke from the product, please disconnect the power immediately and call our certified service center (CSC).
- Do not use damaged power plugs.
- Do not touch power plugs with wet hands. It is hazardous of electric-shock or fire.
- Do not use the product near flammable objects.
- Please turn OFF the product during indoor-use when it is lightning or the product is idle.
- Please put the ReverseTap parts beyond the reach of children or impaired people.
- Do not wash the product parts in dishwasher or with benzene, thinner, or sodium hypochlorite. It may cause damage to the product.
- This manual can be downloaded via ReverseTap website. www.reversetap.com.

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.

Children shall not play with the appliance.

Cleaning and user maintenance shall not be made by children without supervision.

- A tilt of less than 2° need not be stated. An instruction such as “the appliance has to be placed in a horizontal position” is sufficient.

This appliance is only to be installed in locations where it can be overseen by trained personnel.

- This appliance access to the service area is restricted to persons having knowledge and practical experience of the appliance, in particular as far as safety and hygiene are concerned.
- This product may cause more noise than other consumer appliances.
This product is designed to generate noise lower than 70dB. If you think that the noise is too loud, contact the certified service center (CSC).
- The initial operation may generate a clacking noise, which is normal ; it comes from the solenoid valve as the plunger hits the iron wall when the valve is opened.

PAGE	4	What is ReverseTap ? / The Installation of ReverseTap / Recommended Operating Environment of ReverseTap
PAGE	5	ReverseTap SF-series Specification
PAGE	6	ReverseTap SF-series Box Contents
PAGE	7	Names and Functions of Each Part of ReverseTap S-Series
PAGE	8	Maintenance Guidelines for Each Part of ReverseTap S-Series
PAGE	8	NOZZLE
PAGE	9	GRIPPER 및 VALVE HOUSING
PAGE	10	TOP COVER & NOZZLE COVER
PAGE	11	BEER TAP BRACKET SET
PAGE	12	PROTECT COVER / DC 24 V CONNECTOR CABLE
PAGE	13	FILTER FITTING
PAGE	14	Instructions & Cautions for ReverseTap Disposable Cup
PAGE	15	Instructions & Cautions for ReverseTap Reusable Cup
PAGE	16	Maintenance Guidelines for ReverseTap
PAGE	17	Solution Guidelines for ReverseTap (1/2)
PAGE	18	Solution Guidelines for ReverseTap (2/2)
PAGE	19	Specifications for ReverseTap Cup and Accessories

ReverseTap is an innovative beer dispensing system.

It is an upward dispensing system, different from the conventional downward dispensing system.

There are several benefits of ReverseTap compared to the conventional dispensing system.





- It is easily accessible through simple instructions
- It maximizes profit by preventing the loss of beer with its foam amount control feature.
- It is faster compared to the conventional beer tap, which makes serving much more customers possible within certain time length.
- It fills and stops automatically. This can free the two hands of the worker and enhance the worker's productivity.
- The novelty of upward dispensing concept itself is highly attractive to the customers, and BLU and Smart pad can also be used as a powerful marketing tool.

The Installation of ReverseTap


- Installations of ReverseTap are managed by our certified service center (CSC).
- Please be advised that the product installations done by an individual or any other company than CSC shall exclude the product from our after service.
- Information regarding CSC can be collected via regional distributors and our website. (www.reversetap.com)

Recommended Operating Environment for ReverseTap


- Recommended Operating Temperature : 20 ± 5 °C
- Recommended Operating Humidity : 40 ~ 70 %
- Do not use the dispenser with hot beverages. (over 40 °C) It may damage the product.
- Do not use the dispenser with undrinkable liquid.
- Do not use the dispenser with drinks with potential to create precipitate such as fruit pulp or coffee powder. It may clog ReverseTap valve and cause malfunctioning.
- Please contact CSC for more information.

	RD S1	RD S2 (SL2)	RD S3	RD S4
Product Size	248 x 372 x 140 mm	384 x 372 x 140 mm	520 x 372 x 140 mm	656 x 372 x 140 mm
BLU (LCD) Display Size	140 x 115 mm	276 x 115 mm (7 inch)	412 x 115 mm	548 x 115 mm
Product Weight	4.2 kg	7.2 kg	10.3 kg	13.2 kg
Packaging Size	295 x 435 x 215 mm	440 x 435 x 215 mm	570 x 435 x 215 mm	705 x 435 x 215 mm
Packaging Weight	6.0 kg	10 kg	13.5 kg	16.5 kg
Certification	   			
Type	BLU	BLU (Smart pad)	BLU	BLU
사용 전압	100~240 V / 50-60 Hz, 2.71 A		100~240 V / 50-60 Hz, 5 A	
Material	AL, SUS, PC, etc.			
Color Chart	Metallic Silver, Pale Amber			


BLU Version Product Line-up




RD S1



RD S2

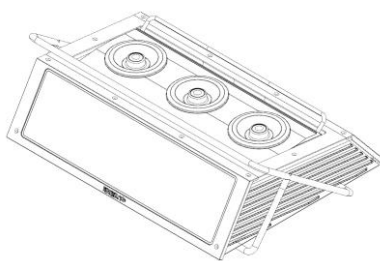


RD S3

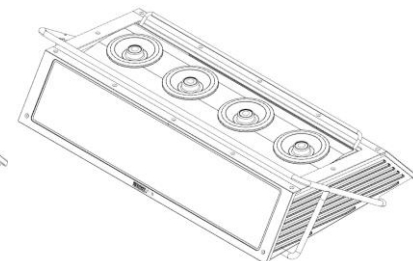


RD S4

SMART Version Product Line-up




RD SL2

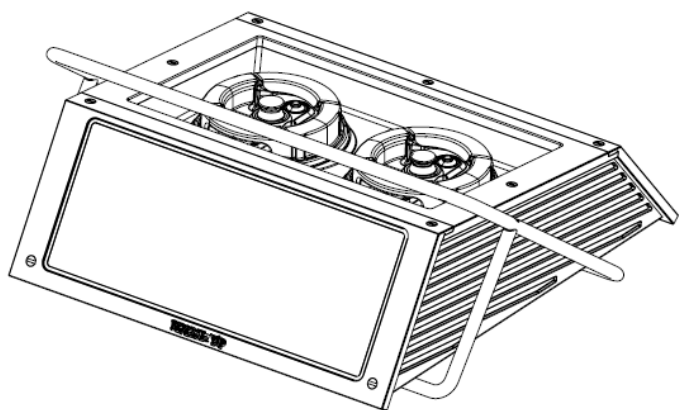


ReverseTap S-series Main body

- GRIPPER 2 ea (# of units)
- NOZZLE & Hygienic COVER 1 ea (# of units)
- BEER TAP FRAME 1 SET

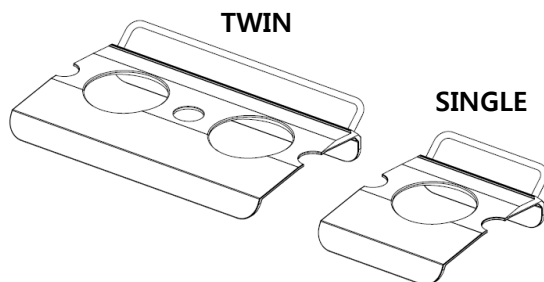

PROTECT COVER

- S1 : SINGLE X 1 ea
- S2, SL2 : TWIN X 1 ea
- S3 : SINGLE X 3 ea
- S4 : TWIN X 2 ea



NOZZLE COVER
(# of units)




BEER TAP BRACKET SET
(# of units)


- BODY 1 ea
- COVER 1 ea
- CONNECTOR 1ea
- Fastening bolt 1 ea



CLEANING NOZZLE
(# of units)



FILTER FITTING
(# of units)




ADAPTOR 1 SET

- S1, S2, SL2 : 2.71 A
- S3, S4 : 5 A





USER MANUAL 1 SET (H/W, S/W)




USB memory stick 1 ea

- SMART version ONLY

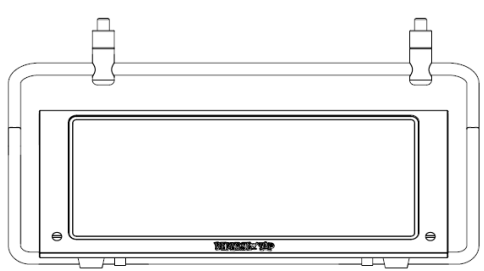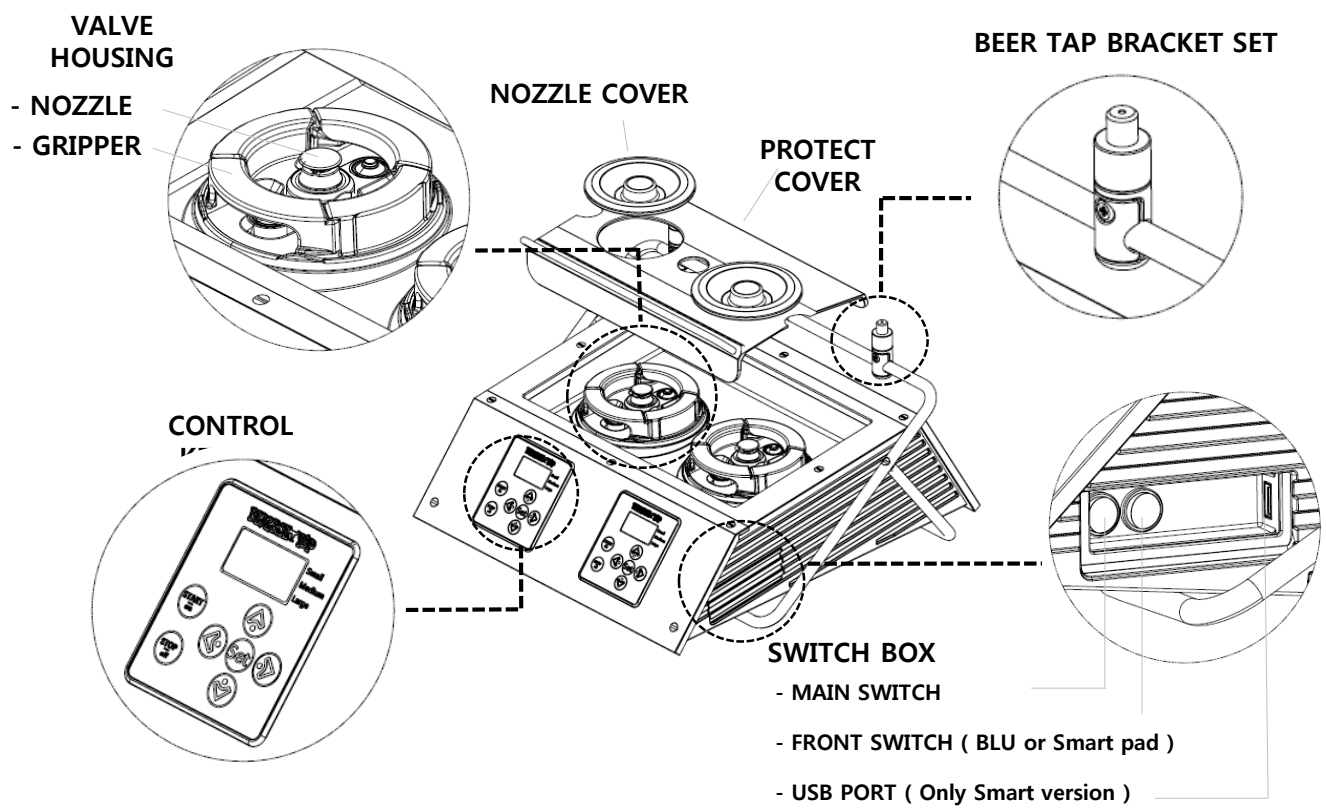


BLU

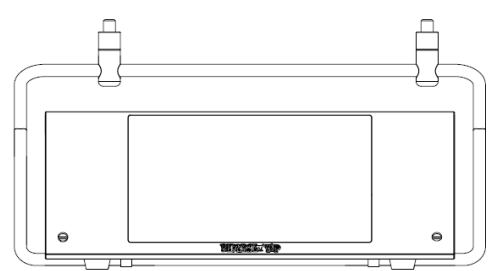

SMART PAD (Only Smart version)



DC 24V CONNECTOR (WATERPROOF)

RUBBER STOPPPER




SOLENOID VALVE SET

- COOLING LINE INLET&OUTLET
- BEVERAGE LINE INLET

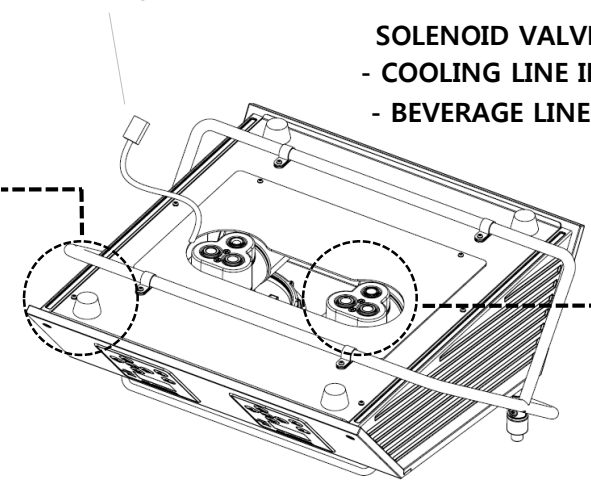


NOZZLE

- The NOZZLE takes very important role as it makes beverage to flow into the cup. Therefore, it should be taken care of in a very clean and safe way, and please call CSC if any problem occur.
- The assembled, red-colored part is an O-ring for watertightness. Please contact CSC for any damage or loss. (They are general-purpose products which can be easily purchased.)
(Name: S20,S22 / Material: Silicone)
- Bubble pipe, which is an optional part, is capable of dispensing nitro coffee with soft foam.
- NOZZLE Disassembly and Assembly Instructions
 - Grab each side of the NOZZLE and twist counterclockwise to assemble, and vice versa.
 - Please be aware not to assemble with excessive force which may make disassembling difficult.
 - Please be aware that the presence of foreign substance on the contact surface may result in leakage.
- Cautions while washing and storage
 - Disassemble and wash the NOZZLE with warm water and neutral detergent after daily use.
 - Please be careful not to scratch on a surface and O-ring, and wipe out water with soft clothes.
 - Please reassemble the NOZZLE with ReverseTap after washing, and keep with hygiene cap covered.

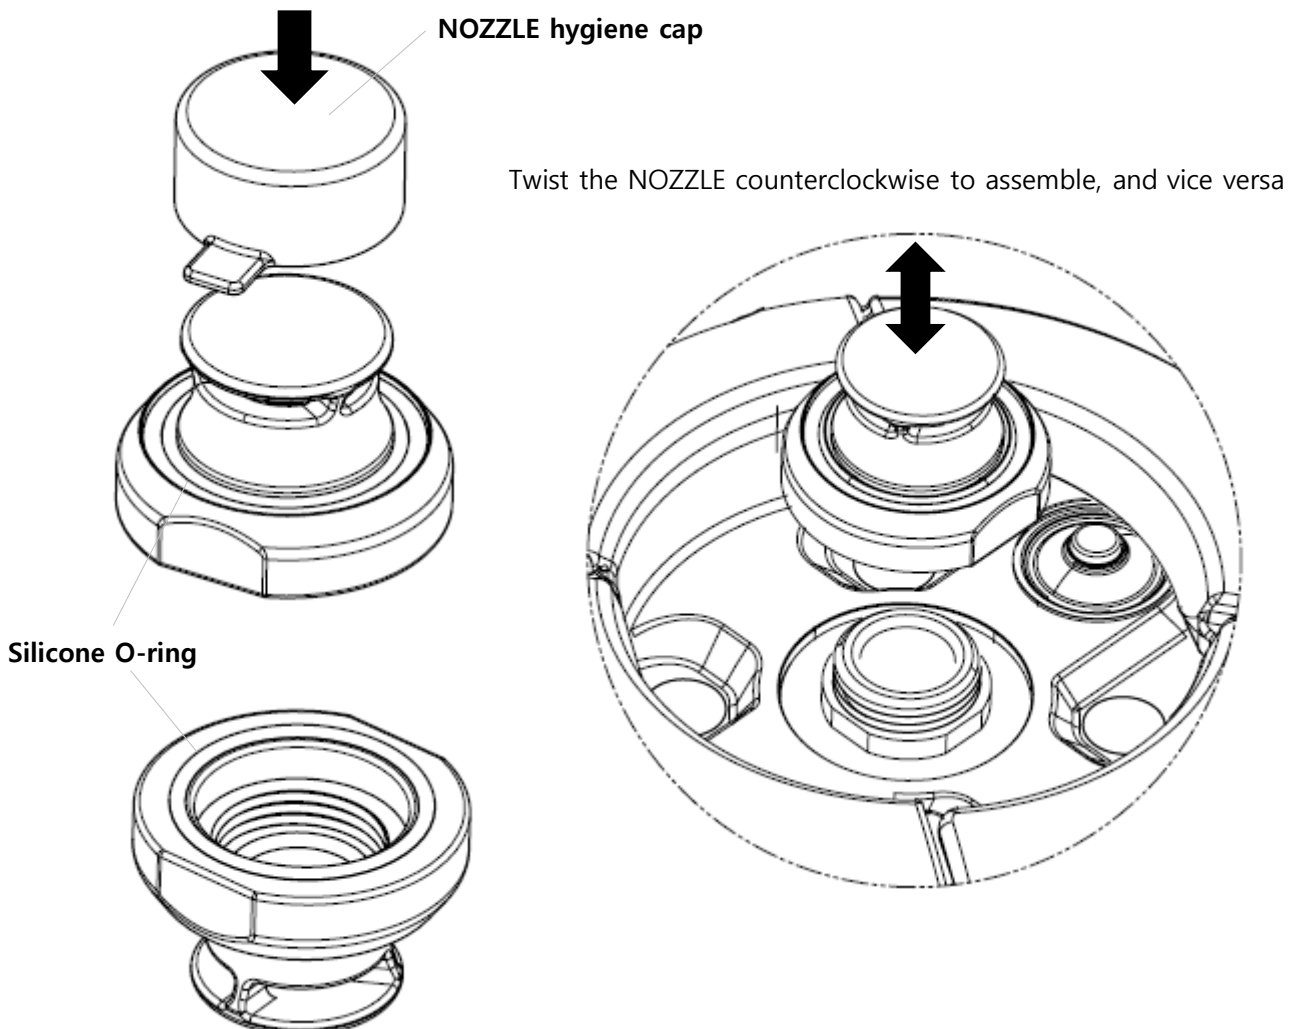


GRIPPERS & VALVE HOUSINGS

- Semi-transparent region on each side of GRIPPER and the touching surface of VALVE HOUSING take the roles of grabbing a cup with magnetic force. Presence of foreign substance may result in escape of the cup.
- Please wash the GRIPPERS and VALVE HOUSINGS before reusing after a certain time length of idleness. If not, it may result in malfunction due to the viscosity of dry beverage.
- Presence of foreign substance on a cup-trap region may result in escape of the cup.
- The buttons located on a lower center of each GRIPPER are cup-detecting sensors. (Applying excessive force may damage the part)
- Please be careful with stopper on VALVE HOUSINGS which keeps GRIPPERS from escaping.
- GRIPPER Disassembly and Assembly Instructions
 - You can disassemble GRIPPER from VALVE HOUSING by grabbing the center of GRIPPER and pulling outwards and upwards. (assembly is done reverse)
 - Please make sure the GRIPPER is properly working after assembly by pulling it outwards several times. (It may operate improperly if the bottom of GRIPPER gets caught by the stopper.)
- Cautions while washing and storage
 - Disassemble and wash VALVE HOUSINGS with warm water and neutral detergent after daily use.
 - Please be careful not to scratch on a surface of VALVE HOUSINGS, and wipe out water with soft clothes.
 - Wash disassembled GRIPPERS with warm water and neutral detergent.
 - After all the washing process, store GRIPPERS and VALVE HOUSINGS reassembled.

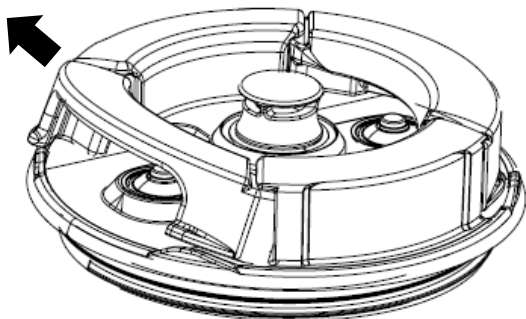


You can disassemble GRIPPER from VALVE HOUSING by grabbing the center of GRIPPER and pulling outwards and upwards. (assembly is done in reverse)

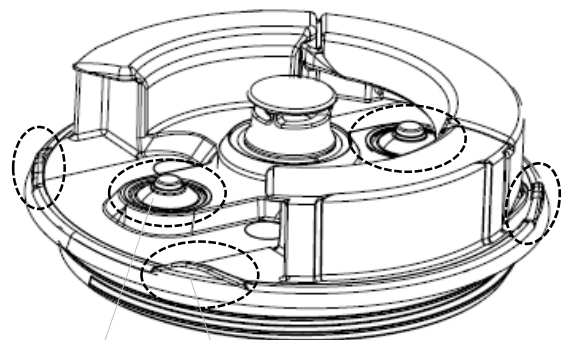

Be careful not to make GRIPPERS caught by stopper.

This is a cup-detecting sensor, so please do not apply excessive force or press with sharp edges

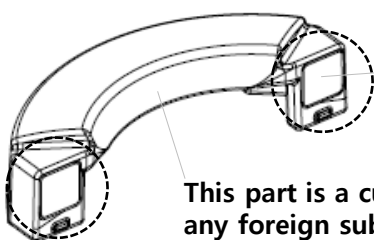


This part takes the role of grabbing a cup with magnetic force. Presence of foreign substance may result in escape of the cup.

This part is a cup-trap region. Be careful not to let any foreign substance get in.

TOP COVER & NOZZLE COVER


- The surface of TOP COVER is Teflon-coated (identical to a frying pan's surface), so be careful not to wear out the coating while washing and handle with care to prevent scratch or any damage.
- TOP COVER is designed to have slope to make cleansing water flow towards the CONTROL KEYPAD. If the slope is not towards the CONTROL KEYPAD, please adjust the slope using the RUBBER STOPPER.
- There is a drain hole where cleansing water is disposed. Please be careful not to clog the hole with foreign substance.
- The drain hole connects to disposal container through hose. Be careful not to let disposal container overflow.
- It is convenient to connect the drain hose directly to sewers.
- The NOZZLE COVER is used to protect the idle NOZZLE from dust or foreign substance.
- NOZZLE COVER can be used to insert disposable cups much easily.
(Please refer to page 16 or ReverseTap Youtube video clip: www.youtube.com/reversetap)
- NOZZLE COVER can be used to protect idle cups from dust or foreign substance by covering the top end of the stack.
- Cautions while washing and storage
 - Disassemble and wash with warm water and neutral detergent after daily use.
 - Use soft clothes to wipe the parts and be careful not to scratch or damage the surface.
 - Please keep the parts safely to prevent its loss.

TOP COVER is designed to have slope towards the CONTROL KEYPAD.

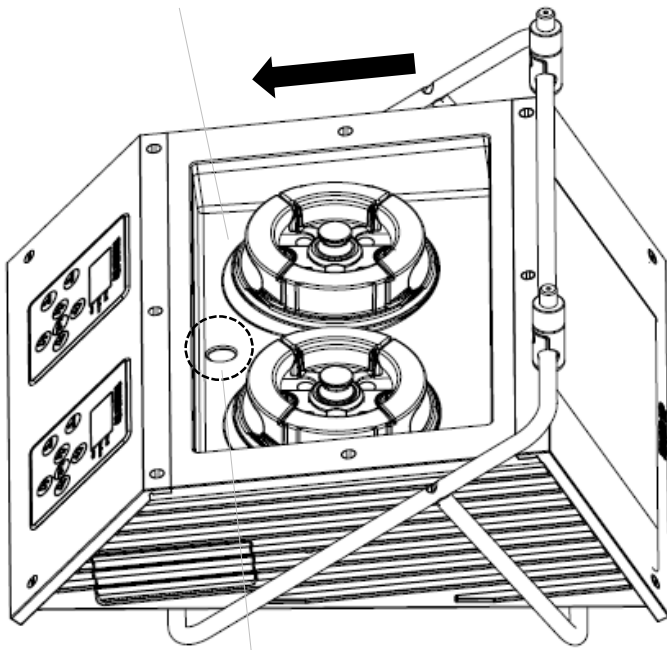


This is where cleansing water is disposed. Please be careful not to clog up the hole.

NOZZLE COVER can be used to protect cups from dust or foreign substance by covering the top end of the stack.

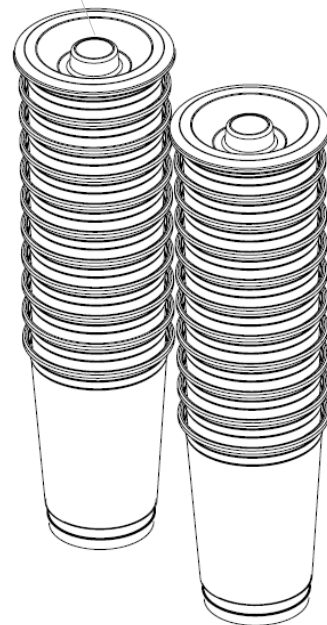


BEER TAP BRACKET SET

- BEER TAP BRACKET SET is consisted of four components.
(BEER TAP BRACKET BODY, COVER, CONNECTOR, screw bolts)
- 1 set is provided for each number of ReverseTap dispenser units.
- The red parts of BEER TAP BRACKET BODY are O-rings for fastening purpose. Please contact CSC if any damage or loss. (It is general-purpose product which can be easily purchased.) (Name : S7 / Material : silicone)
- BEER TAP BRACKET SET Assembly Instructions
 - Fasten BEER TAP BRACKET BODY and COVER while covering TAP FRAME as the picture shown below.
 - If you decide the preferred angle and the location, tightly fasten the BEER TAP BRACKET with screw bolt to prevent them from slipping.
(Forcing BEER TAP BRACKET to move while it is fastened may damage the surface of TAP FRAME. Please unfasten before moving its angle or location.)
 - Assemble your BEER TAP to the CONNECTOR
(CONNECTOR's threads : 3/8" 16UNC)
 - Put the CONNECTOR-BEER TAP assembly on the BODY.
CONNECTOR can be revolved 360° on an axis of the assembly direction
 - If the BEER TAP is overweighing or the centroid is located too far from BEER TAP BRACKET SET, it may not be fixed on the TAP FRAME. Please contact CSC for any problem.
- Cautions while washing and storage
 - Disassemble and wash with warm water and neutral detergent after daily use.
 - Please keep the parts safely to prevent its loss.
(You may use ready-made M4 x 10mm sized bolt for fastening)

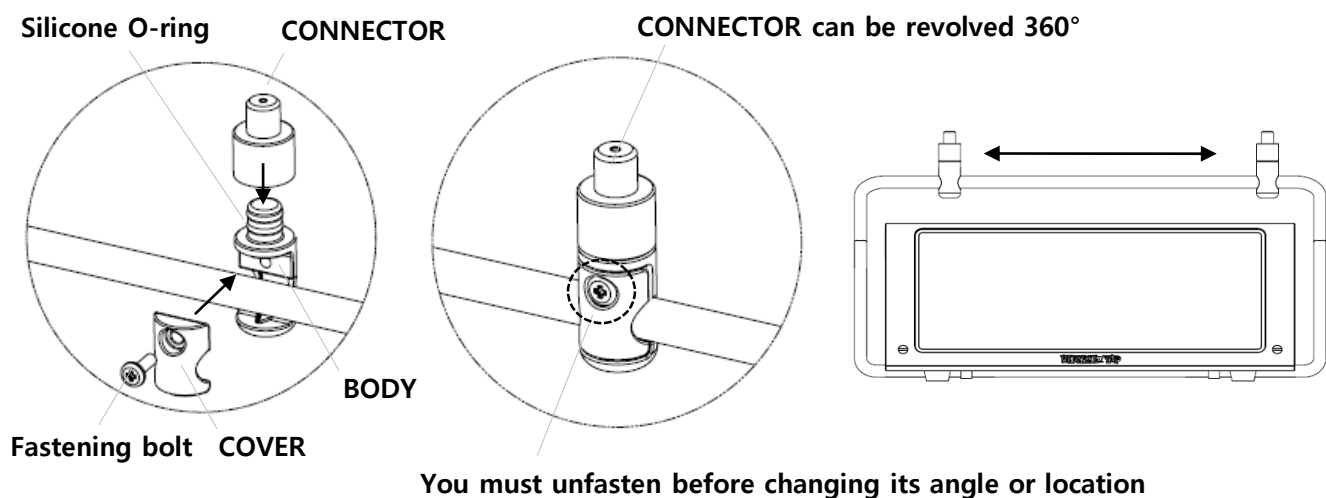




PROTECT COVER

- PROTECT COVER is for protecting the inside parts such as VALVE HOUSING, and keeping liquids from splashing out.
- 3 pieces of PROTECT COVER from S1 are provided for S3, and 2 pieces of PROTECT COVER from S2 are provided for S4.
- For easier inspection of TOP COVER, pull the handle and open the PROTECT COVER 90° to put it fixed.
- Cautions while washing and storage
 - Use soft clothes to wipe the parts and be careful not to scratch or damage the surface.

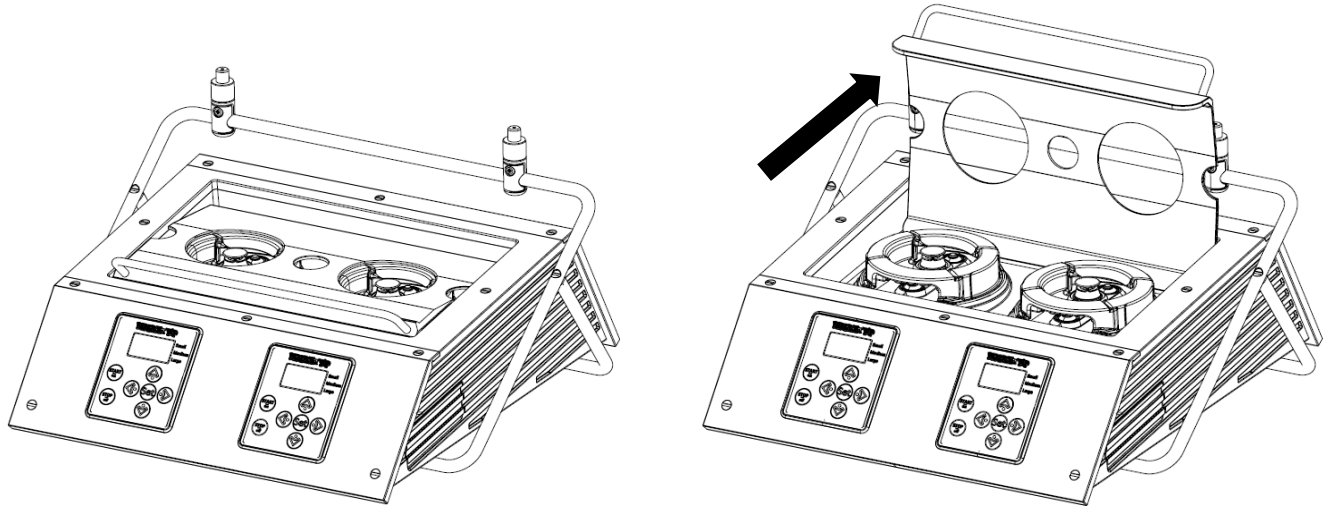

SWITCH BOX

- This is where ReverseTap's main switch and USB port are located.
- From the CONTROL KEYPAD, they are ordered main switch, front switch, and USB port.
- USB port is only in SMART version.
- Do not touch power plugs with wet hands. It is hazardous of electric-shock or fire.
- Please cover the switch box after use of main switch and USB port.
- It should be treated with care and please contact CSC if any problem occurs.

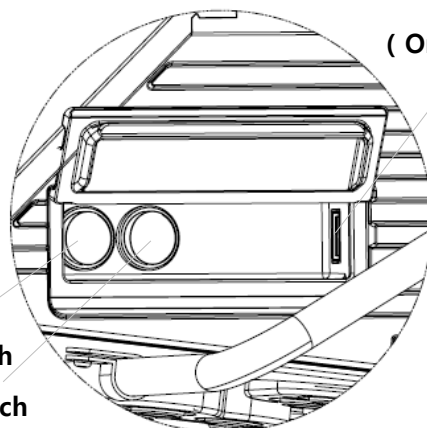

USB port
(Only Smart version)


Main switch
Front switch

- Grab a groove beneath of the protect cover lid and bend it upwards to open the SWITCH BOX. They are flexible materials and does not break.
- Make sure the lower part is aligned with nearby plates properly when closing.


BLU (Back Light Unit)

- BLU is a luminous front panel for advertising the beverage and brand marketing purpose.
- Please be careful not to apply excessive impact or break the panel. It may result in malfunctioning.
- You may order and use a film called Backlit as the designated size below.
- Apply transparent double-sided tape within 5 mm edge of BLU boundary to stick and apply the Backlit film, and you may use chemicals such as sticker removers to eliminate tape residue.
- Cautions while washing
 - Use soft clothes to wipe the parts and be careful not to scratch or damage the surface.

	S1	S2	S3	S4
Backlit Size	150 x 115 mm	286 x 115 mm	422 x 115 mm	558 x 115 mm

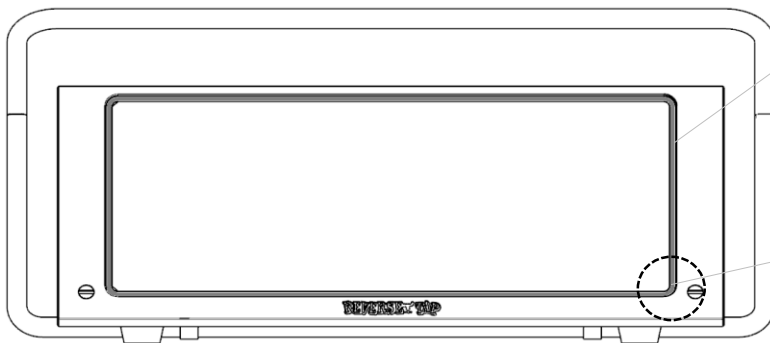


Use transparent double-sided tape to attach the Backlit film within 5 mm range from the edge.



SMART PAD (Smart Version Only)



- SMART PAD is a smart device that is capable of utilizing ReverseTap app and playing Youtube video and multimedia contents, etc.
- SMART PAD is a capacitive touch screen, so please be careful not to make the screen wet. It may result in malfunctioning.
- Please be careful not to break or apply too much impact on the screen. It may result in malfunctioning.
- Please refer to the separately included S/W manual for more information regarding using and controlling of SMART PAD.
- Cautions while washing
 - Use soft clothes to wipe the parts and be careful not to scratch or damage the surface.

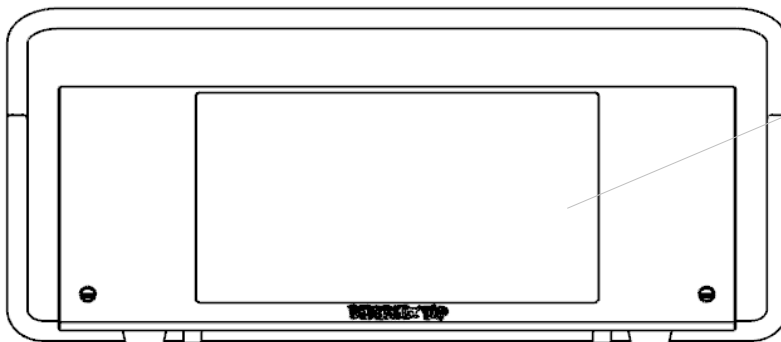

Be careful not to make the screen wet. It may result in malfunctioning.

DC 24 V CONNECTOR CABLE

- This is a power cable for connecting adapter to electricity to supply power for ReverseTap.
- Connection between ReverseTap is waterproof-designed, whereas the opposite side of an adapter is not. Therefore, please keep it away from water. It has the risk of electric-shock and fire.
- If a cable sheath wears out or a cable is disconnected, stop operating immediately and disconnect the power. Then please contact CSC.

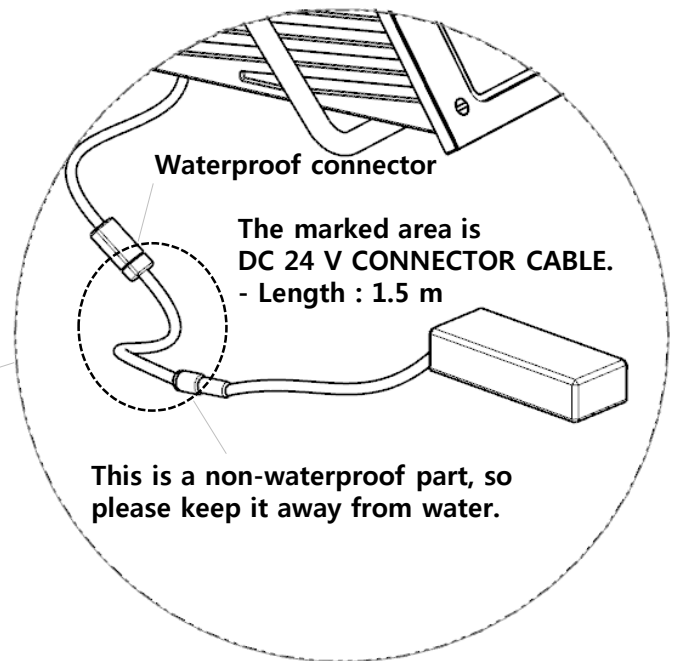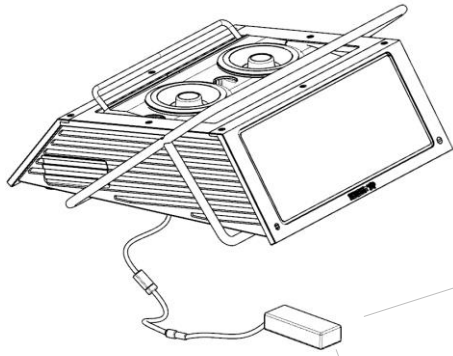


Different kind of power cables shall be provided depending on their country.


- Ex. Korea (220 V), USA (110 V)

RUBBER STOPPPER

- RUBBER STOPPPER is for prevent ReverseTap slipping and adjust its height.
- Twist RUBBER STOPPPER counterclockwise to lift ReverseTap.
- Maximum possible lift is 10mm, and intention of adjusting further may result in escaping of RUBBER STOPPPER.

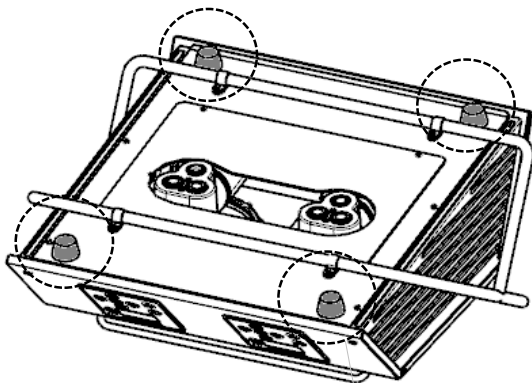

RUBBER STOPPPER

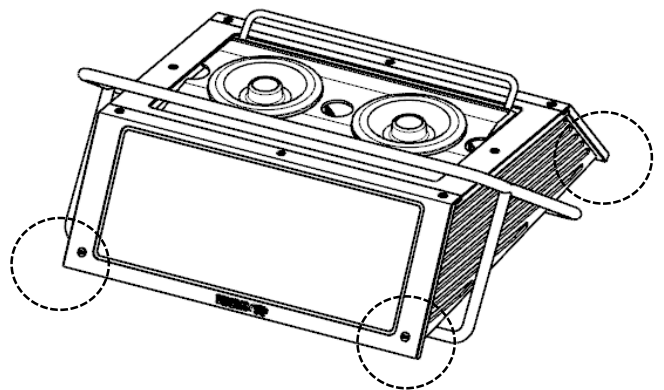


- Lift the corners a little near the RUBBER STOPPPER that you want to adjust.
- Lifting too much may result in disconnection of the tubes for beverage or cooling water.

FILTER FITTING


- FILTER FITTING is to filter substances coming from couplers.
 - Flowing in of substances may contaminate the beverage or damage the valve of ReverseTap.
- FILTER FITTING is to be installed during the first installation by CSC.
 - Installation location is to the tube closest to couplers.
- The stainless steel filter inside FILTER FITTING needs to be maintained on certain time period.
 - It is recommended to wash on a weekly basis
 - If the dispensing is disabled, clogging of the filter may be the issue. Please open the side cover and check immediately.
- Cautions while washing
 - Even though the coupler is disassembled from keg, the beverage tube has pressure inside. So be careful when you open the lid.
(Counterclockwise : OPEN / Clockwise : CLOSE)
 - Wash the filter thoroughly with cleaning tools such as brush.
 - Wash the inner surface of the lid where the filter come in contact with.
 - Assemble filter and close the lid firmly after washing is complete.

Beverage Flow

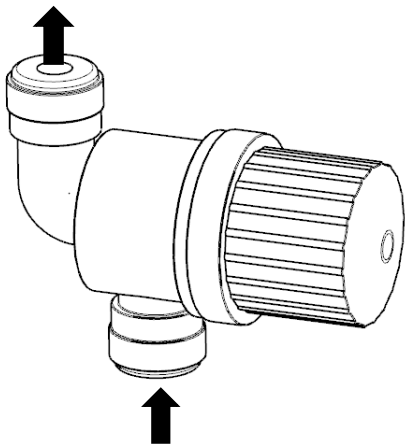

Beverage Flow


The filter is made of stainless steel and needs periodic maintenance.

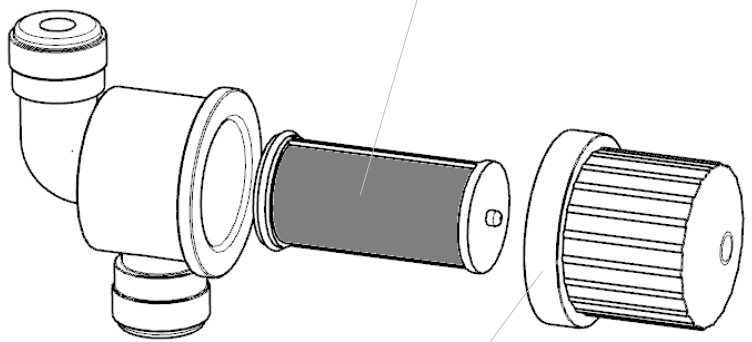

**Counterclockwise : OPEN
Clockwise : CLOSE**


Instructions

Step 1

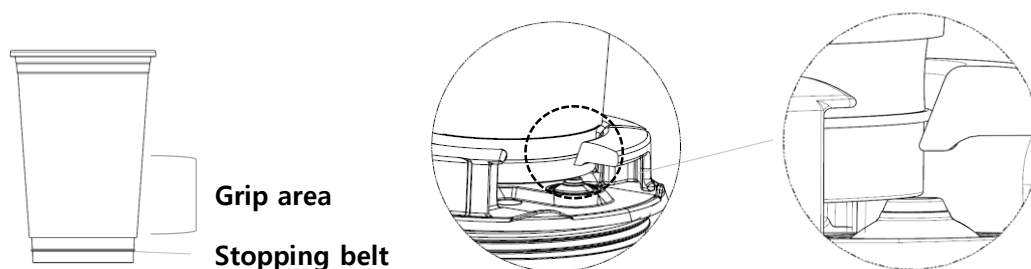


- Grab on the lower part of the cup firmly, and attach the stopping belt on the GRIPPERS.

Step 2

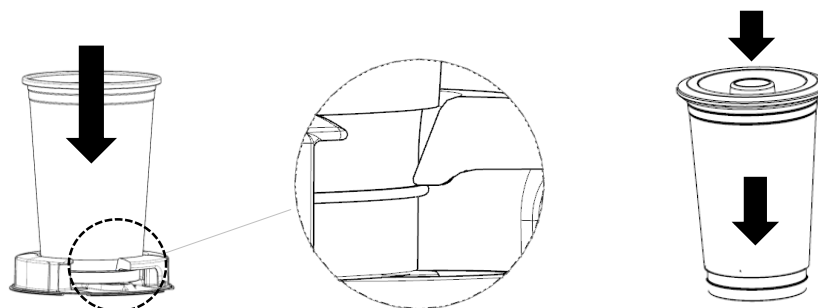

- Press the cup downwards while rotating the cup simultaneously, until the stopping belt is snapped into the GRIPPERS. Make sure the stopping belt is stuck on both sides of the GRIPPERS.
- Green LED light of the cup-detecting sensor indicates the cup is put properly, and red LED light indicates the cup is not inserted properly on that side. In this case, please try inserting the cup again.
- You can insert the cup much easier by covering the cup with the NOZZLE COVER and pressing it down. (In this case, the hygiene safety of the NOZZLE COVER must be ensured.)

Step 3

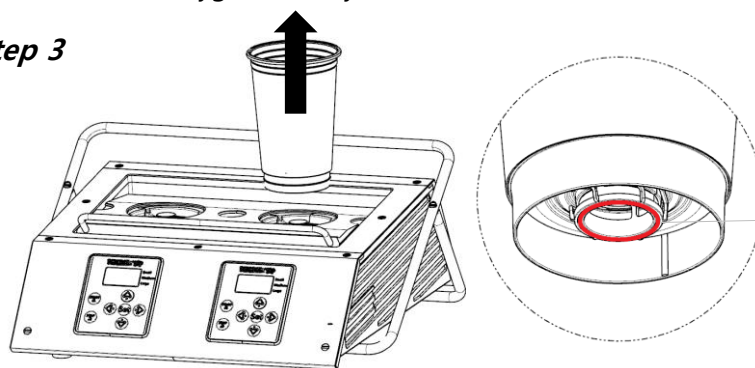

- While wiping the residue under the cup, please be careful not to press the red-marked part (CAP) in the picture as it may make the beverage leak.
- Such instruction needs to be explained to the customers who buy a drink from ReverseTap. You also need to be careful not to lay down the cup on sharp surface which it can press and open the cap.


- After the beverage is filled to the cup, take it out while rotating the cup simultaneously.
- If you need to take out the cup while dispensing is in progress, press STOP button before you take out the cup.
- Watch out for few drops of residue under the cup which has been transferred from the NOZZLE. (This is dropping of residues under the cup, NOT leaking of the cup.)

Cautions

- It is not recommended to use ReverseTap Disposable cups (RT 400D, RT 520D, RT 700D) multiple times. All responsibilities for any problems from reusing disposable cups are held by users.
- The top rim of the cup requires hygienic care, so do not grab on this part when inserting the cup. (You may use the NOZZLE COVER just as described above to insert the cup conveniently.)
- It is recommended to wipe out the residue left under the cup after dispensing beverage is complete. (For convenience, you may use an optional item, BOTTOM COVER, to cover the bottom of the cup.)

Instructions


Step 1

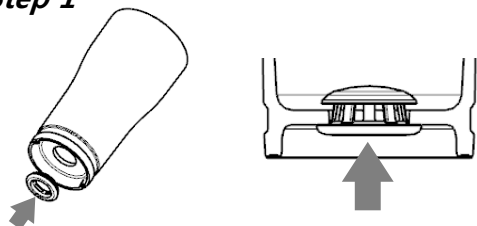

- Place the silicone cap on the bottom of the cup, and push the cap into the cup to assemble.

※ **Put on sanitary gloves before assembling.**


Step 2

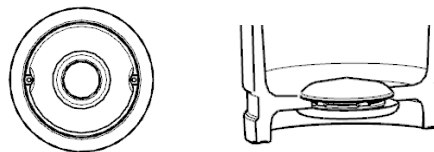

- Ensure the cap assembly is the same as the picture shown.
- The top and the bottom part of the cap must be seated on the inner and the bottom surface of the cup, respectively.


※ **Be careful not to let any foreign substance get in between the cap and the cup.**

Step 3

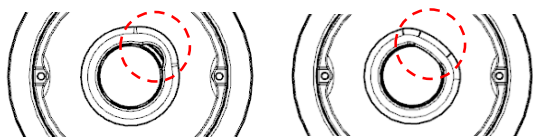

- It may cause a lack of watertightness if the cap is folded or overlapped as shown in the picture.

Step 4



- For an easy use with ReverseTap, grab the lower half of the cup and put in vertically, and tilt a little to remove the cup.

※ **Be sure the center of the nozzle and the cap is properly aligned when inserting the cup.**

How to wash silicone caps

- Rub silicone cap softly in a diluted neutral detergent with warm water and then rinse with clean water.
- Use of dishwasher is possible with good drainage tools such as net shaped container.
- After washing, gently shake off or tap onto a clean dry towel to dry.
- For more detailed demonstration, watch uploaded video clip on ReverseTap website.

CAUTION

- Do not use Reusable cup for anything other than its intended use.
- Do not apply excessive force to the product. It may result in transformation and leakage.
- Do not keep the cups overlapped. It may result in surface damage.
- Do not boil the product in boiling water nor heat directly in the flame.
- The product can be washed in the dishwasher operated under 85°C (water temperature).
- Do not stretch the cap with excessive force. It may result in product failure.
- Do not use scrubs or polishing powders with rough surfaces for washing the product.
- Do not use detergents containing citric acid(lemon juice) for washing the product as citric acid is known for causing crack in Tritan.
- Be careful not to let any foreign substance get in between the cap and the cup.
- We will not be held responsible or accept any liability for any damage to the product caused due to customer's carelessness.

ReverseTap Maintenance Guideline

- ReverseTap dispenser and its parts must be cleanly washed after daily use.
- You must remove coupler from keg or stop CO₂ supply after daily use. (Close the middle valve)
- You must disconnect the ReverseTap plug before washing the machine. It is hazardous of electric shock and fire.
- Excluding the SWITCH BOX, ReverseTap dispenser is water-resistant. Wash it with clean water and soft clothes and dry. (Please close the lid of SWITCH BOX completely before washing and keep away from water)
- Do not use rough surface cleaning tools such as scrub brush or steel wool.
- Please refer to '**Maintenance Guidelines for Each Part of ReverseTap S-Series**' for detail information regarding maintenance for each ReverseTap part.

Cleaning Beverage Line

- Beverage lines must be cleaned and cleanly maintained on a daily basis.
- Fill the cleaning can with clean water and connect with coupler.
- Inject CO₂ into the cleaning can.
- Switch to CLEANING NOZZLE and connect a tube from the nozzle to a bucket or a drain.
(For convenience, you can utilize CLEANING MODE.)
- You may continue draining until you see clean water coming out.
(Average discharge amount is 500mL ~ 1,000mL for chillers, and 100mL ~ 200mL for kegerators.)
- Stop CO₂ injection and discharge the leftover CO₂ from cleaning can safely.
- After removing coupler from cleaning can, wash the coupler with clean water and keep it away from having foreign substances get into it.
- If foreign substances get into ReverseTap from the coupler, the valves in ReverseTap may get clogged and break, which will make problem such as no beverage dispensing or non-stopping discharge.
- For long time no use, after discharging all beverage in the line, clean and dry the line.
(Do as the cleaning method of beverage lines, and continue until you see CO₂ come out after all water is discharged.)
- Please refer to the official ReverseTap YouTube channel to watch cleaning instruction video.

Problem	Diagnose	Solution
No beer dispensing?	Is not adapter unplugged?	Plug power cord to adapter.
	Is not the keg empty?	Switch to new keg.
	Is not keg coupler connected properly?	Connect keg coupler to the keg.
	Is not CO ₂ gas valve closed?	Open CO ₂ gas valve.
	Is beer not dispensed when you press cup-detecting sensor?	Contact the CSC for service.
	Is not ReverseTap power turned on?	Turn on the ReverseTap power.
	Is the inside of the chiller frozen too much?	Contact the chiller manufacturer for service.
	Are not the beverage lines bent too much?	Straighten up the beverage lines. Contact CSC if the lines are not fairly straighten up.
	Are not FILTER FITTINGS clogged?	Check the filter inside FILTER FITTING and clean it if they are clogged.
Too much foam?	Is not chiller power turned on?	Turn on the chiller.
	Is there enough water inside the chiller?	Supply enough water to the chiller until the water comes out from the chiller's Overflow gate.
	Is the chiller operated for fair amount of time?	You must fill the chiller with water and operate 24 hours prior to beer dispensing for regular beer discharge.
	If using kegerators, are the kegs cooled enough?	It varies by the beer type, but you must cool the keg down to around 4°C for at least 24 hours before use.
	Is not the inside of the chiller frozen too much?	Contact the chiller manufacturer for service.
	Has not it been quite a while since you first opened and used the keg?	Old kegs which are opened for a long time do cause a lot of foam. Please switch to a new keg. (Recommended keg use after opening : 3 days)
	Have you leaved CO ₂ valve opened and connected with keg for a long time?	Too much CO ₂ injection in a keg causes a lot of foam. Please switch to a new keg.
	Is the CO ₂ gas pressure within the average range?	Adjust the pressure to an appropriate range. (250 ~ 300 kPa)
	Is not CO ₂ gas depleted?	Contact the CO ₂ gas supplier.

Problem	Diagnose	Solution
Too much foam?	Did you keep the keg in a cool place?	The recommended keg temperature is 4~6°C. Please keep the keg in cool place so the keg is maintained in a recommended temperature.
	Did you see bubbles passing in beverage lines when dispensing?	Remove bubbles from beverage lines. (Discharge beer raising gas pressure by 50 kPa, but do not exceed 400kPa.)
	Are not the beverage line bent too much or leaking?	Exchange the beverage lines and insulate them. For tube shortage, please contact CSC.
Keypad does not work?	Reboot the power.	Contact CSC if the problem continues.
LED color is not proper?	Confirm the set value.	If the LED color is not expressed as it is set, please contact CSC for assistance.
LED light is keep turned on?	Reboot the power.	If the problem continues, please contact CSC for assistance.
Cup is not inserted well?	Did you wash GRIPPERS regularly?	Wash GRIPPERS until there is no foreign substance on them. Remove every foreign substances on VALVE HOUSING where GRIPPERS come in contact with.
	Are the GRIPPERS and the NOZZLES assembled properly?	Assemble GRIPPERS and NOZZLES properly.

After service may be paid even during warranty period on the following conditions:

- If reinstalling due to moving of the product or the place.
- If the product is damaged or failed due to external impact or dropping.
- If the product is malfunctioning due to use of any products that are not specified by the Company.
- If the repair or customizing is done by the customer individually.
- If the product is used with inappropriate electric power.
- If the customer did not follow the caution provided in the manual.
- If the product is failed or damaged due to natural disaster (lightning, fire, earthquake, storm and flood damage, etc)
- If the end-life of the consumable parts ended.

		Disposable Cup		
		RT 400D	RT 520D	RT 700D
Product Size		Ø92 x 110 (mm)	Ø92 x 135 (mm)	Ø92 x 174 (mm)
Product Weight		16.4 gr	22.2 gr	27.8 gr
Capacity	Max	400 mL	520 mL	700 mL
	Standard	330 mL	473 mL	568 mL
Packaging Size		480 x 390 x 545 (mm)		
Packaging Weight		8.4 Kg	10 Kg	9.5 Kg
Packaging Unit		440 EA	400 EA	300 EA
Certification		FDA certified by SGS		

		Reusable Cup			Fit	
		RT 400P1	RT 520P1	RT 520G1	RF 25	RF 35
Product Size		Ø81 x 161(mm)	Ø77 x 134(mm)		98 x 66 x 73(mm)	98 x 66 x 73(mm)
Product Weight		125 gr	107 gr		85 gr	87gr
Capacity	Max	400 mL	520 mL		-	-
	Standard	330 mL	473 mL		-	-
Packaging Size		514 x 352 x 312(mm)	536 x 366 x 364(mm)		Ø92 x 120 (mm)	
Packaging Weight		8.2 Kg	10.3 Kg		0.15 Kg	0.15 Kg
Packaging Unit		48 EA	48 EA		1 EA	1 EA
Certification		FDA certified by SGS				

ReverseTap Customer Service

- Information regarding Certified Service Center (CSC) can be collected via regional distributors and our website. (www.reversetap.com)

Trademarks

- ReverseTap and ReverseTap logo are registered trademarks of NPC Co., Ltd.
- Other names and marks are the property of their respective owners.

Refunds / Exchange / Warranty Policy

- Refunds or exchange may be offered within 15 days after purchase if the product cannot be used due to its defect.
This does NOT apply if the customer is responsible for the damage due to one's carelessness.

NPC CO., LTD.

F-5F, Innovalley 255, Pangyo-ro, Bundang-gu,
Seongnam-si, Gyeonggi-do, Republic of Korea 13486



www.reversetap.com



www.youtube.com/reversetap



www.facebook.com/reversetap

FDA certified
by SGS



Webpage QR Code

Copyright © 2017 NPC Co., Ltd. All rights reserved.

This manual is protected under international copyright laws. No part of this guide may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of NPC Co., Ltd.

